


# 1U2S CLOUD STORAGE SERVER



## Thunder CX GC79A-B7132

B7132G79AE12HR / B7132G79AE12HR-2T

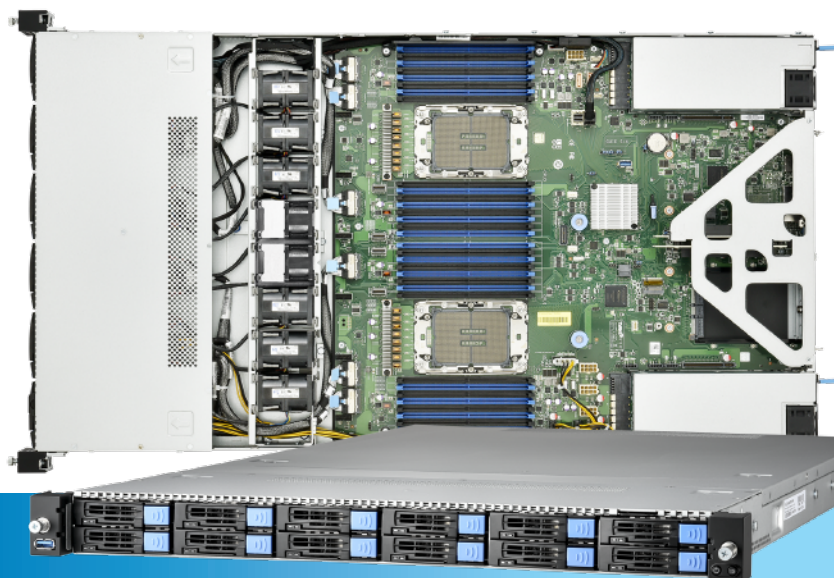

### Front View



B7132G79AE12HR-2T / B7132G79AE12HR  
(12) 2.5" hot-swap NVMe HDD/SSDs with  
(4) 2.5" hot-swap SATA 6Gb/s

### Back View




(1+1) 1,200W CRPS, 80+ Platinum

1U2S Eaglestream storage server platform for maximum memory capacity for high-performance in-memory computing

- Dual LGA4677 socket
- (2) 44rd Gen Intel® Xeon® Scalable Processors
- (16+16) DDR5 DIMM slots, Support up to up to 4,096GB RDIMM/3DS RDIMM DDR5 4800/4400/4000 memory
- (12) 2.5" Hot-swap NVMe HDD/SSDs w/ (4) 2.5" Hot-swap SATA drive bays
- (2) 22110/2280 NVMe M.2 slots
- (2) FH/HL PCIe Gen.5 x16 slots
- (2) GbE + (1) IPMI ports or (2) 10GbE + (1) IPMI ports
- Onboard BMC w/ IPMI and iKVM support
- (1+1) 1,200W CRPS, 80+ Platinum

### Summary Table

SKU	Motherboard	Storage
B7132G79AE12HR	S7132GM2NRE	(12) 2.5" Hot-swap NVMe HDD/SSDs w/ (4) 2.5" Hot-swap SATA
B7132G79AE12HR-2T	S7132GM2NRE-2T	(12) 2.5" Hot-swap NVMe HDD/SSDs w/ (4) 2.5" Hot-swap SATA




# Thunder CX GC79A-B7132

B7132G79AE12HR

# TYAN

## Specifications

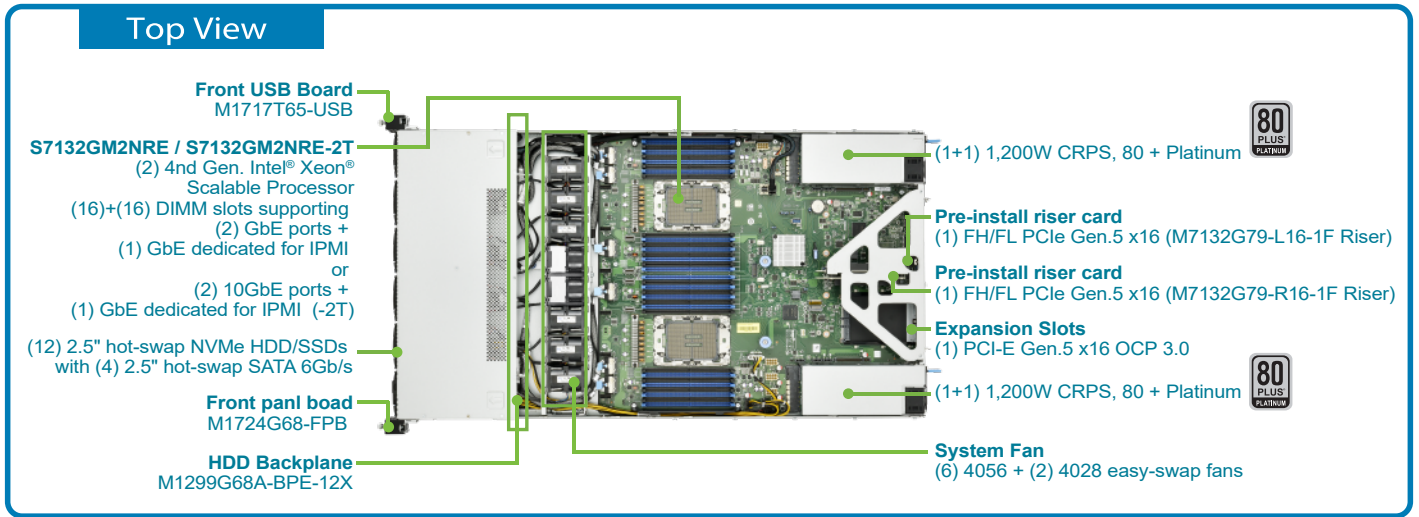

<b>System</b>	<b>Form Factor</b>	1U Rackmount
	<b>Chassis Name</b>	GC79A
	<b>Dimension (D x W x H)</b>	31.1" x 17.26" x 1.69" (790mm x 438.5mm x 43mm)
	<b>Motherboard</b>	S7132GM2NRE #
	<b>Motherboard Notification</b>	# The motherboard not sold separately
<b>Front Panel</b>	<b>Buttons</b>	(1) ID / (1) PWR w/ LED
	<b>LEDs</b>	(1) ID / (1) PWR
	<b>I/O Ports</b>	(1) USB 3.2 Gen.1 port
	<b>Q'ty / Type</b>	(12) 2.5" hot-swap NVMe HDD/SSDs with (4) 2.5" hot-swap SATA 6Gb/s
	<b>HDD backplane support</b>	(4) SATA 6Gb/s & SAS* / (12) NVMe U.2
<b>External Drive Bay</b>	<b>Supported HDD Interface</b>	SAS 12Gb/s / SATA 6Gb/s / NVMe
	<b>Notification</b>	The SAS/SATA HDD backplane is connected to onboard SATA connection by default. Please contact Tyan technical support if a discrete SAS HBA/RAID adapter is required.
	<b>System Cooling Configuration</b>	<b>FAN</b> (8) 4cm fans
<b>Power Supply</b>	<b>Type</b>	CRPS
	<b>Input Range</b>	AC 100-127V/13A / AC 200-240V/7A
	<b>Efficiency</b>	80 plus Platinum
	<b>Output Watts</b>	1,000 Watts (100-127V AC input) / 1,200Watts (200-240V AC input)
<b>Processor</b>	<b>Redundancy</b>	1+1
	<b>Q'ty / Socket Type</b>	(2) LGA4677
	<b>Supported CPU Series</b>	4th Gen. Intel Xeon Scalable Processors
<b>Chipset</b>	<b>Thermal Design Power (TDP) wattage</b>	Max up to 270W (TDP)
	<b>PCH</b>	Intel C741
	<b>Supported DIMM Qty</b>	(16)+(16) DIMM slots
<b>Memory</b>	<b>DIMM Type / Speed</b>	RDDR5 4800 w/ ECC (1.1V) when 2DPC/1DPC / 3DS RDDR5 4800 w/ ECC (1.1V) when 2DPC/1DPC
	<b>Capacity</b>	Up to 4,096GB RDIMM/3DS RDIMM DDR5 4800/4400/4000 memory
	<b>Memory channel</b>	8 Channels per CPU
	<b>Memory voltage</b>	1.1V
<b>Expansion Slots</b>	<b>PCIe</b>	(2) PCIe Gen.5 x16 slot
	<b>Pre-installed TYAN Riser Card (PCIe Gen.5)</b>	(1) M7132G79-R16-1F PCIe Gen.5 riser for (1) FH/HL PCIe Gen.5 x 16 / (1) M7132G79-L16-1F PCIe Gen.5 riser for (1) FH/HL PCIe Gen.5 x 16
	<b>Others:</b>	(1) PCI-E Gen.5 x16 OCP 3.0 mezzanine slot
<b>LAN</b>	<b>Port Q'ty</b>	(2) GbE ports + (1) GbE dedicated for IPMI
	<b>Controller</b>	Intel I210-AT
	<b>PHY Controller</b>	Realtek RTL8211F

<b>Storage</b>	<b>Connector</b>	(10) SATA
	<b>Storage Controller</b>	Intel C741
	<b>SATA Speed</b>	6Gb/s
	<b>RAID</b>	RAID 0/1/10/5 (Intel RSTe)
	<b>Storage Connector (M.2)</b>	(2) 22110/2280 (by PCIe Gen.4 interface)
<b>Storage (Optional)</b>	<b>NVMe Connector (U.2)</b>	(6) SFF-TA-1016 (MCIO 8x) for (12) front NVMe
	<b>VROC Support</b>	Yes
<b>Graphic</b>	<b>Connector type</b>	D-Sub 15-pin
	<b>Resolution</b>	Up to 1920x1200
	<b>Chipset</b>	Aspeed AST2600
<b>Input / Output</b>	<b>USB</b>	(1) USB3.2 Gen.1 port (@ front) / (1) USB3.2 Gen.1 port (@ rear)
	<b>VGA</b>	(1) D-Sub 15-pin port
	<b>RJ-45</b>	(2) GbE ports + (1) dedicated GbE for IPMI
<b>TPM (Optional)</b>	<b>TPM Support</b>	Please refer to our TPM supported list.
	<b>Interface</b>	SPI
<b>System Monitoring</b>	<b>Chipset</b>	Aspeed AST2600
	<b>Voltage</b>	Monitors voltage for CPU, memory, chipset & power supply
	<b>Temperature</b>	Monitors temperature for CPU & memory & system environment
	<b>LED (On system front panel)</b>	Over temperature warning indicator / Fan & PSU fail LED indicator / Over voltage warning indicator
	<b>Others</b>	Watchdog timer support
<b>Server Management</b>	<b>Onboard Chipset</b>	Onboard Aspeed AST2600
	<b>AST2500 iKVM Feature</b>	24-bit high quality video compression / Supports storage over IP and remote platform-flash / USB 2.0 virtual hub
	<b>AST2500 IPMI Feature</b>	IPMI 2.0 compliant baseboard management controller (BMC) / 10/100/1000 Mb/s MAC interface
<b>BIOS</b>	<b>Brand / ROM size</b>	AMI / 64MB
	<b>Feature</b>	Hardware Monitor / FAN speed control automatic / Boot from USB device/PXE via LAN/Storage / Console Redirection / SMBIOS 3.3/PnP/Wake on LAN / ACPI sleeping states S0, S5
<b>Operating System</b>	<b>OS supported list</b>	Please refer to our AVL support lists.
	<b>Regulation</b>	<b>FCC (SDoC)</b> Class A <b>CE (DoC)</b> Class A <b>VCCI</b> Class A <b>RCM</b> Class A <b>CB/LVD</b> Yes
<b>Operating Environment</b>	<b>Operating Temp.</b>	10° C ~ 35° C (50° F ~ 95° F)
	<b>Non-operating Temp.</b>	- 40° C ~ 70° C (-40° F ~ 158° F)
<b>RoHS</b>	<b>In/Non-operating Humidity</b>	90%, non-condensing at 35° C
	<b>RoHS 6/6 Compliant</b>	Yes

(Specifications are subject to change without notice. Items pictured may only be representative.)

MiTAC Computing Technology Corp

**USA**  
Tel: +1-510-651-8868  
Fax: +1-510-651-7688

**Taiwan**  
Tel: +886-3-327-5988  
Fax: +886-3-327-6312

**China**  
Shanghai Tel: +86-021-61431188 #1361  
China Tel: +86-010-62381108 #2485

**Japan**  
Tel: +81-3-3769-8311  
Fax: +81-3-3769-8328

**EMEA**  
Tel: +44 07540328523  
Email: robin.daunter@tyan.com


# Thunder CX GC79A-B7132

B7132G79AE12HR-2T

# TYAN

## Specifications

### Top View

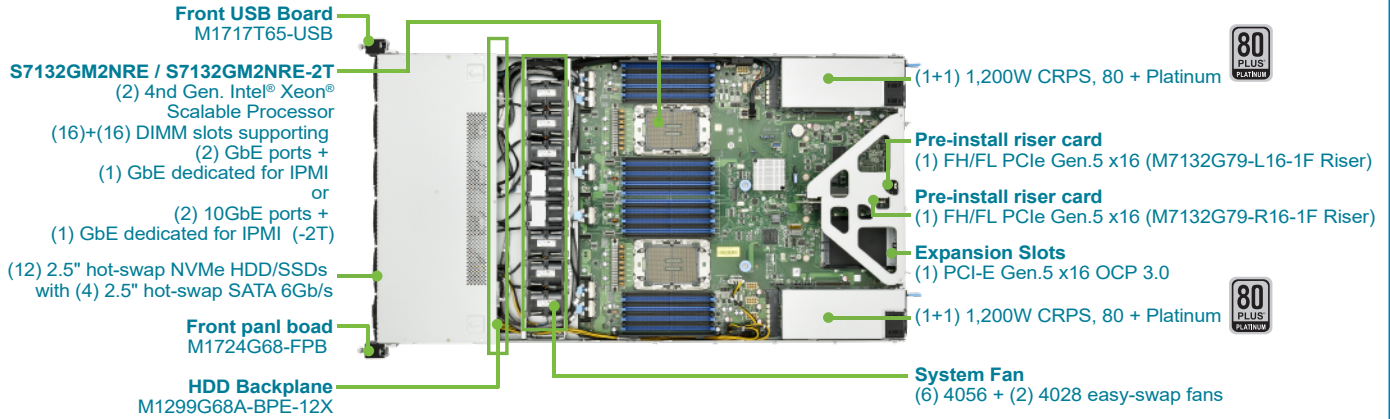

System	<b>Form Factor</b>	1U Rackmount
	<b>Chassis Name</b>	GC79A
	<b>Dimension (D x W x H)</b>	31.1" x 17.26" x 1.69" (790mm x 438.5mm x 43mm)
	<b>Motherboard</b>	S7132GM2NRE #
	<b>Motherboard Notification</b>	# The motherboard not sold separately
	<b>Gross Weight</b>	25 kg (55.1 lbs)
	<b>Net weight</b>	17.5 kg (39 lbs)
Front Panel	<b>Buttons</b>	(1) ID / (1) PWR w/ LED
	<b>LEDs</b>	(1) ID / (1) PWR
	<b>I/O Ports</b>	(1) USB 3.2 Gen.1 port
External Drive Bay	<b>Q'ty / Type</b>	(12) 2.5" hot-swap NVMe HDD/SSDs with (4) 2.5" hot-swap SATA 6Gb/s
	<b>HDD backplane support</b>	(4) SATA 6Gb/s & SAS* / (12) NVMe U.2
	<b>Supported HDD Interface</b>	SAS 12Gb/s /SATA 6Gb/s /NVMe
	<b>Notification</b>	The SAS/SATA HDD backplane is connected to onboard SATA connection by default. Please contact Tyan technical support if a discrete SAS HBA/RAID adapter is required.
System Cooling Configuration	<b>FAN</b>	(8) 4cm fans
Power Supply	<b>Type</b>	CRPS
	<b>Input Range</b>	AC 100-127V/13A / AC 200-240V/7A
	<b>Efficiency</b>	80 plus Platinum
	<b>Output Watts</b>	1,000 Watts (100-127V AC input) / 1,200Watts (200-240V AC input)
Processor	<b>Redundancy</b>	1+1
	<b>Q'ty / Socket Type</b>	(2) LGA4677
	<b>Supported CPU Series</b>	4th Gen. Intel Xeon Scalable Processors
Chipset	<b>Thermal Design Power (TDP) wattage</b>	Max up to 270W (TDP)
	<b>PCH</b>	Intel C741
Memory	<b>Supported DIMM Qty</b>	(16)+(16) DIMM slots
	<b>DIMM Type / Speed</b>	RDDR5 4800 w/ ECC (1.1V) when 2DPC/1DPC / 3DS RDDR5 4800 w/ ECC (1.1V) when 2DPC/1DPC
	<b>Capacity</b>	Up to 4,096GB RDIMM/3DS RDIMM DDR5 4800/4400/4000 memory
	<b>Memory channel</b>	8 Channels per CPU
	<b>Memory voltage</b>	1.1V
Expansion Slots	<b>PCIe</b>	(2) PCIe Gen.5 x16 slot
	<b>Pre-installed TYAN Riser Card (PCIe Gen.5)</b>	(1) M7132G79-R16-1F PCIe Gen.5 riser for (1) FH/HL PCIe Gen.5 x 16 / (1) M7132G79-L16-1F PCIe Gen.5 riser for (1) FH/HL PCIe Gen.5 x 16
	<b>Others:</b>	(1) PCI-E Gen.5 x16 OCP 3.0 mezzanine slot
LAN	<b>Port Q'ty</b>	(2) GbE ports + (1) GbE dedicated for IPMI
	<b>Controller</b>	Intel I210-AT
	<b>PHY Controller</b>	Realtek RTL8211F

Storage	<b>Connector</b>	(10) SATA
	<b>Storage SATA Controller</b>	Intel C741
	<b>Speed</b>	6Gb/s
Storage (Optional)	<b>RAID</b>	RAID 0/1/10/5 (Intel RSTe)
	<b>Storage NVMe Connector (M.2)</b>	(2) 22110/2280 (by PCIe Gen.4 interface)
Storage (Optional)	<b>Storage NVMe Connector (U.2)</b>	(6) SFF-TA-1016 (MCIO 8x) for (12) front NVMe
	<b>VROC Support</b>	Yes
Graphic	<b>Connector type</b>	D-Sub 15-pin
	<b>Resolution</b>	Up to 1920x1200
Input /Output	<b>Chipset</b>	Aspeed AST2600
	<b>USB</b>	(1) USB3.2 Gen.1 port (@ front) / (1) USB3.2 Gen.1 port (@ rear)
Input /Output	<b>VGA</b>	(1) D-Sub 15-pin port
	<b>RJ-45</b>	(2) GbE ports + (1) dedicated GbE for IPMI
TPM (Optional)	<b>TPM Support</b>	Please refer to our TPM supported list.
	<b>Interface</b>	SPI
System Monitoring	<b>Chipset</b>	Aspeed AST2600
	<b>Voltage</b>	Monitors voltage for CPU, memory, chipset & power supply
	<b>Temperature</b>	Monitors temperature for CPU & memory & system environment
	<b>LED (On system front panel)</b>	Over temperature warning indicator / Fan & PSU fail LED indicator / Over voltage warning indicator
	<b>Others</b>	Watchdog timer support
Server Management	<b>Onboard Chipset</b>	Onboard Aspeed AST2600
	<b>AST2500 iKVM Feature</b>	24-bit high quality video compression / Supports storage over IP and remote platform-flash / USB 2.0 virtual hub
	<b>AST2500 IPMI Feature</b>	IPMI 2.0 compliant baseboard management controller (BMC) / 10/100/1000 Mb/s MAC interface
BIOS	<b>Brand / ROM size</b>	AMI / 64MB
	<b>Feature</b>	Hardware Monitor / FAN speed control automatic / Boot from USB device/PXE via LAN/Storage / Console Redirection / SMBIOS 3.3/PnP/Wake on LAN / ACPI sleeping states S0, S5
Operating System	<b>OS supported list</b>	Please refer to our AVL support lists.
Regulation	<b>FCC (SDoC)</b>	Class A
	<b>CE (DoC)</b>	Class A
	<b>VCCI</b>	Class A
	<b>RCM</b>	Class A
	<b>CB/LVD</b>	Yes
Operating Environment	<b>Operating Temp.</b>	10° C ~ 35° C (50° F ~ 95° F)
	<b>Non-operating Temp.</b>	-40° C ~ 70° C (-40° F ~ 158° F)
	<b>In/Non-operating Humidity</b>	90%, non-condensing at 35° C
RoHS	<b>RoHS 6/6 Compliant</b>	Yes

(Specifications are subject to change without notice. Items pictured may only be representative.)

MiTAC Computing Technology Corp

USA  
Tel: +1-510-651-8868  
Fax: +1-510-651-7688

Taiwan  
Tel: +886-3-327-5988  
Fax: +886-3-327-6312

China  
Shanghai Tel: +86-021-61431188 #1361  
China Tel: +86-010-62381108 #2485

Japan  
Tel: +81-3-3769-8311  
Fax: +81-3-3769-8328

EMEA  
Tel: +44 07540328523  
Email: robin.daunter@tyan.com